

PART NO.

**P2RFC-2541-XX**

REV

DESCRIPTION

DWN

DATE

APPROVED

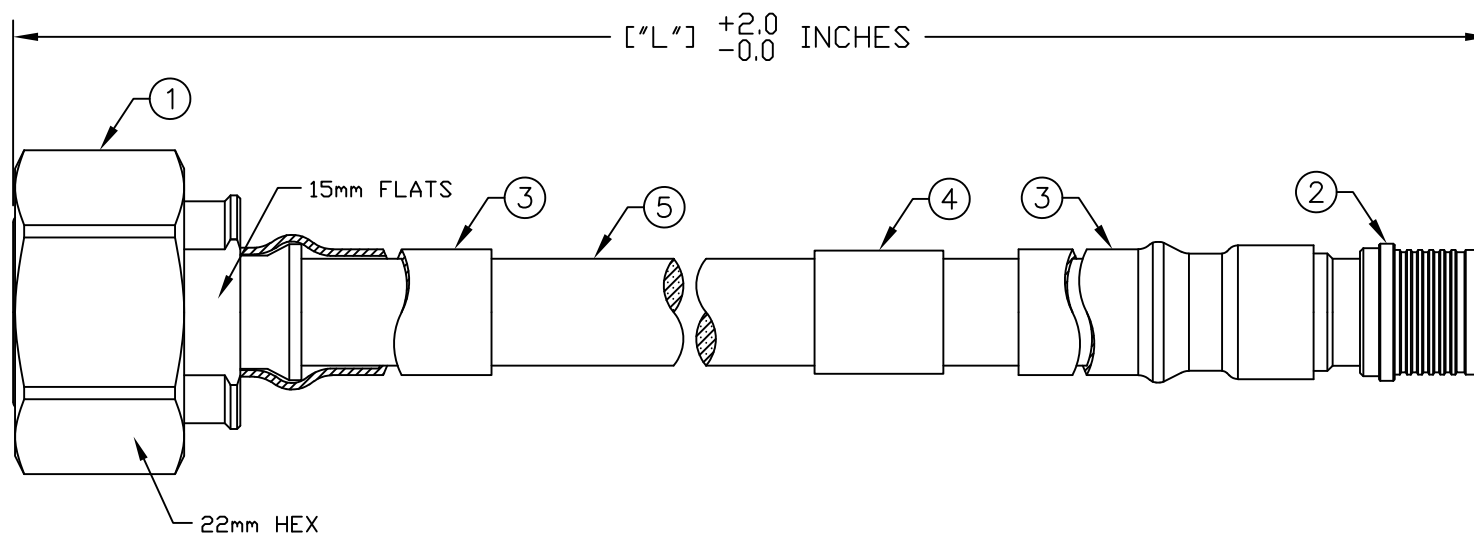
-

ENGINEERING RELEASE

CZS

06/20/20

JDMc

**P2RFC-2541-XX**

[\"L\"] LENGTH IN INCHES

CONFIGURATION ID

CABLE ASSEMBLY DESIGNATOR

STANDARD CABLE LENGTHS [\"L\"]:

-12 [1 FOOT]

-24 [2 FEET]

-36 [3 FEET]

-48 [4 FEET]

-60 [5 FEET]

-72 [6 FEET]

FOR CUSTOM LENGTHS REPLACE XX  
FOR NUMBER OF INCHES**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-6 GHz

3RD INTERMODULATION:  $\leq -155$  dBc @ 700MHz & 1900MHz

3RD INTERMODULATION TEST METHOD: 2x43dBm CARRIERS

NOTE: BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

5	CBL-TFT-401LF	1	1/4" FLEXIBLE PLENUM CABLE	---
4	THT-64-427-3	1	BRADY LABEL	VINYL
3	ST-P0375A-K	2	HEAT SHRINK TUBING	BLACK
2	RQA-5000-HPL	1	QMA PLUG CONNECTOR	WHITE BRONZE
1	RFD-43MS-HPL	1	4.3/10 PLUG CONNECTOR	WHITE BRONZE
#	PART NUMBER	QTY	DESCRIPTION	FINISH

CUSTOMER  
OUTLINE DRAWINGALL DIMENSIONS  
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
AND [MILLIMETERS]

DRAWN

C. ZUNIGA

06/20/20

CHECKED

ORJ DRAWN

C. ZUNIGA

06/20/20

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS  
INFORMATION PROPRIETARY  
TO RF INDUSTRIES. ANY  
UNAUTHORIZED USE OF  
THIS DRAWING IS  
EXPRESSLY PROHIBITED  
WITHOUT WRITTEN  
PERMISSION FROM RF  
INDUSTRIES. ANY  
VIOLATION IS PUNISHABLE  
UNDER U.S. COPYRIGHT  
LAWS.**RFconnectors**  
DIVISION OF RF INDUSTRIES, LTD.7610 MIRAMAR RD.  
SAN DIEGO, CA 92126  
(858) 549-6340  
(858) 549-6345 FAX**4.3-10 MALE TO QMA PLUG**

1/4" FLEX PLENUM CABLE ASSEMBLY

SIZE	CABLE GROUP	DWG NO.	REVISION
A	HPL	<b>P2RFC-2541-XX</b>	—
SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1	