
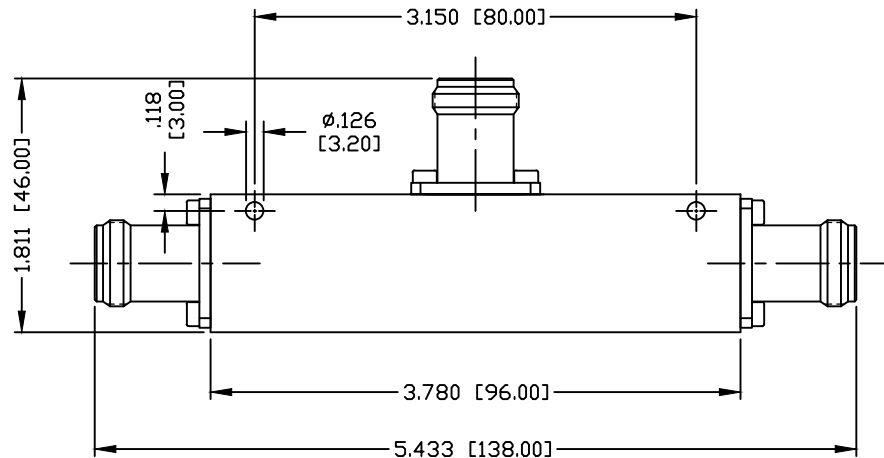


PART NO.

RFPT-NF-PS6

REV	DESCRIPTION	DWN	DATE	APPROVED
A	CORRECTED ELECTRICAL SPECS	CZS	10/09/19	JDMc

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms

FREQUENCY BAND: 138–960 MHz

POWER: 200 WATT

INSERTION LOSS:

–8.1±0.7 @ 137–200 MHz

–7.6±0.6 @ 200–250 MHz

–7.3±0.6 @ 250–380 MHz

–7.0±0.6 @ 380–520 MHz

–6.5±0.5 @ 698–960 MHz

NOMINAL RATIO: 4:1/6dB

OUTPUT SPLIT: –1.6/7.0

VSWR: 1.3 @ 147–380

VSWR: 1.25 @ 380–960

OPERATION TEMPERATURE: –35°C ~ +75°C

HUMIDITY: 5–95%

COLOR: RED

APPLICATION: INDOOR/OUTDOOR

REGULATORY COMPLIANCE: IP65

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

DRAWN C. ZUNIGA	10/09/19
CHECKED	
ORJ DRAWN C. ZUNIGA	05/02/19

**RoHS
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES, ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.

RFconnectors

7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549-6340
DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

**6 dB POWER TAPPER
N FEMALE - 138-960 MHz**

SIZE	CABLE GROUP	DWG NO.	REVISION
A		RFPT-NF-PS6	A
SCALE: NTS	ENGINEERING ID: 2000010	SHEET 1 OF 1	