
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.

ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PAR	RFB-1150	-1		
REV	DESCRIPTION	DWN	DATE	APPROVED
	ENGINEERING RELEASE	czs	11/17/04	JDMc

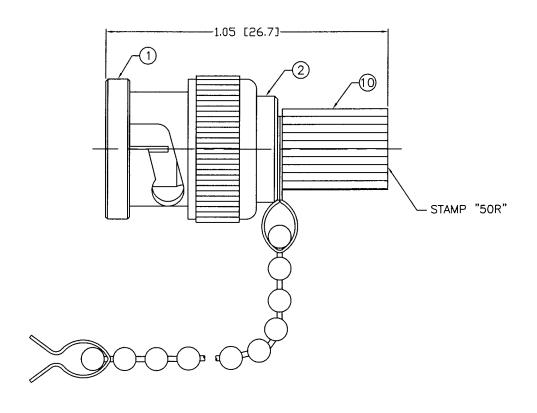

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

RESISTOR: .5 WATT @ ±5%

TEMPERATURE RANGE: -65°C TO 85°C INSULATION RESISTANCE: 5k M Ohms min.

1	SHELL	1	DIECAST ZINC		000459	
2	BODY	1	DIECAST ZINC		000 100	
3	INSULATOR	1	POM		1	
4	GASKET	1	RUBBER			
5	RETAINING RING	1	BRASS	NICKEL, 100μ "	1	
6	SPRING	1	SK5		1	
7	WASHER	1	BRASS	NICKEL, 100μ "	1	
8	PIN	1	BRASS	GOLD, 3μ "		
9	RESISTOR	1	METAL FILM	.5 W		
10	COVER	1	BRASS	NICKEL, 100μ	DRAWN	11/17/04
11					C. ZUNIGA	11/17/04
12					CHECKED N C	1112204
13					ORJ DRAWN	1.1
				:	C. ZUNIGA	11/17/04
#	DESCRIPTION QT	Υ	MATRL	FINISH	APPROVALS	DATE

UNLESS OTHERWISE SPECIFIED:

- 1. REMOVE ALL BURRS
- 2. BREAK ALL CORNERS & EDGES .005 R. MAX.
- 3. CHAMFER 1ST & LAST THREADS 45°
- 4. SURFACE ROUGHNESS 63 FINISH MIL-STD-10
- 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R.
- 6. ALL DIMENSIONS ARE AFTER PLATING.

DIMENSIONS ARE IN INCHES AND [MILLIMETERS] UNLESS OTHERWISE NOTED TOLERANCES ARE:

DECIMALS

.XXX±.003 [.08] .XX±.005 [.13] DIAMETER .XXX±.001 [.03] .XX±.003 [.08]



7610 MIRAMAR RD
SAN DIEGO,CA 92126
(858) 549-6340
(858) 549-6345 FAX

BNC PLUG TERMINATOR

50 OHM RESISTOR, 1/2 WATT

		J, 1111	(20101011, 1/2 11/11	•		
SIZE	CABLE GROUP	,	DWG NO.		REV	
Α	N/	<u> </u>	RFB-1150	1 - 1	-	-
SCALE: NTS		CAD F	TILE OUTLINE	SHEET	1 OF	1